

# UNM STB 780-15-10 1122030309 (No. old: H844000) Product Information Sheet



Technical data	1122030309
Suction capacity	780 l/min
Eff. Delivery quantity	640 l/min
Start-up- / switch-off pressure	13/15 bar
Cylinder / Stages	2/2
Tank volume	10 l
Voltage	400 Volt/50 Hz
Drive power	5.5 kW
Speed	980 min <sup>-1</sup>
Noise	80 dB(A)
Dimensions (WxDxH)	1005 x650x770mm
Air outlet	¾"
Weight	158 kg

## Product Description

- Stationary compressor
- Compressor for work up to 15 bar
- Smooth running belt driven 2-cylinder unit with 2-stage compression
- Suitable for many jobs in the professional field
- Applications:  
Expansion of compressed air systems,  
Increase reliability
- Highest quality of installed components

**UNM STB 780-15-10**  
**1122030309 (No. old: H844000)**  
 Product Information Sheet



**Quiet running and optimal cooling**


due to the new wedge-driven compressor unit with optimal cooling air flow and improved delivery performance

**Reduced noise level**

Less noise from new unit

**Compressor with low speed of rotation**

Reduced vibrations preserve the compressor components

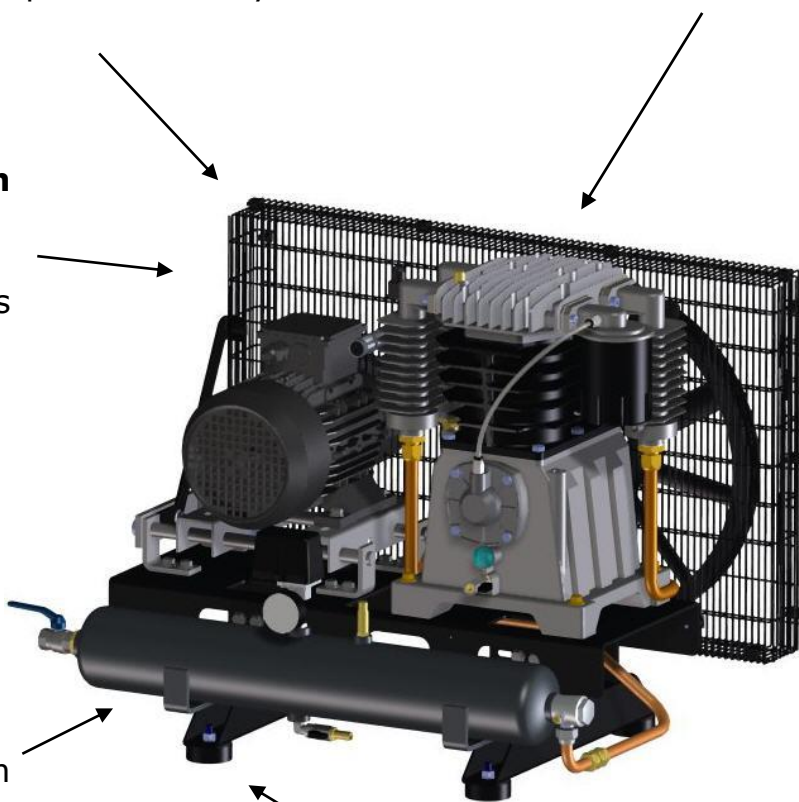

**Long service life**  
 guaranteed by 15-year warranty against rust-through of vessel

**Motionless standing position**

Standard features include: anti vibration rubber feet

**Space-saving design**

Small footprints thanks to optimal arrangement of the components

**Further information**

Complete equipment	Pressure switch, motor protection, safety and check valve, container pressure gauge, unloaded start
Scope of delivery	Instruction manual
Warranty	- 12 months for professional industrial use - 24 months for private use only