

# UNM STS 1250-10-270 XDKC H852011

## Product Information Sheet



Technical data	H852011
Suction capacity	1250 l/min
Eff. Delivery quantity	980 l/min
Start-up- / switch-off pressure	8/10 bar
Cylinder / Stages	2/2
Tank volume	270 l
Voltage	400 Volt/50 Hz
Drive power	7.5 kW
Speed	1240 min <sup>-1</sup>
Noise	84 dB(A)
Dimensions (WxDxH)	1070 x 705 x 1875mm
Air outlet	¾"
Weight	283 kg

## Product Description

- Stationary compressor with star-delta switch with integral motor protection and low voltage circuit breaker which ensure a high degree of operating safety
- Compressor for work up to 10 bar
- Smooth running belt driven 2-cylinder unit with 2-stage compression
- Suitable for many jobs in the professional field
- Applications:  
Expansion of compressed air systems,  
Increase reliability
- Highest quality of installed components
- With high performance cold dryer

# UNM STS 1250-10-270 XDKC H852011

## Product Information Sheet



### Quiet running and optimal cooling

due to the new wedge-driven compressor unit with optimal cooling air flow and improved delivery performance

### Reduced noise level

Less noise from new unit

### Compressor with low speed of rotation

Reduced vibrations preserve the compressor components

### Long service life

guaranteed by 15-year warranty against rust-through of vessel


### Space-saving design

Small footprints thanks to optimal arrangement of the components

### Attached cold dryer

For better air quality and work results

Standard features include: anti vibration rubber feet

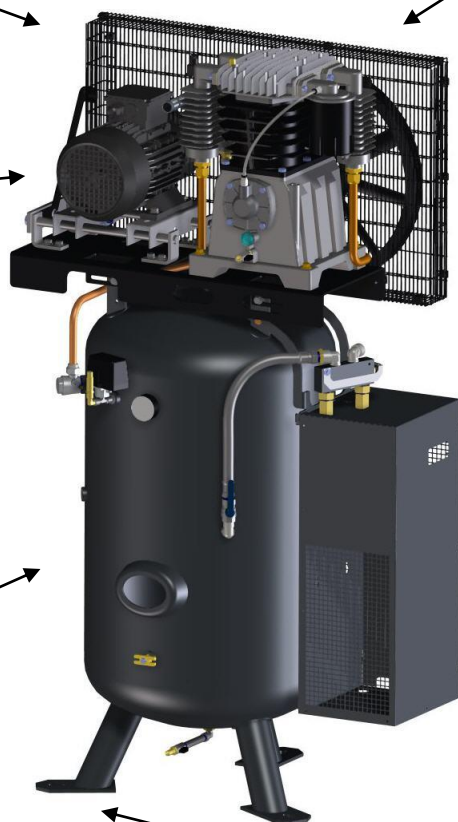

## Further information

Complete equipment

Pressure switch, motor protection, safety and check valve, container pressure gauge, unloaded start

Scope of delivery

Instruction manual

Warranty

- 12 months for professional industrial use  
- 24 months for private use only