

CompactMaster 280-10-20 B A215000

Product specification sheet



Technical Data	A215000
Air displacement	275 l/min
Max. free air delivery	165 l/min
Max. pressure	8/10 bar
Cylinder/Stage	1/1
Tank capacity	20 l
Voltage	230 Volt/50 Hz
Motor output	3,0 kW
Drive	2850 min ⁻¹
Noise level	97 dB(A)
Dimensions(WxDxH)	600 x 490 x 850mm
Weight	36,0 Kg

Product description

Fact Sheet

- Portable, direct driven piston compressor
- Petrol driven air compressor allows use independent of electrical supply
- For applications up to 10 bar
- High quality performing compressor is perfect for professional use
- Equipped with filter pressure reducer and gauges for measuring tank and outlet pressure
- Applications: Using staple and nail guns, blow-out guns, smaller sized paint spraying guns, cartridge guns, grease guns and rivet guns

CompactMaster 280-10-20 B A215000



Product specification sheet

Silent run and perfect cooling due to approved direct driven aggregate and ideal cooling air flow

Independent of electrical power - HONDA-petrol engine air compressor with direct drive


Comfort transportation due to telescopic handle

Excellent working comfort thanks to clearly arranged pressure gauges for measuring tank and outlet pressure

Precise working due to pressure reducing regulator for controlling the air pressure perfectly

Great travelling comfort and optimum puncture protection thanks to large solid rubber wheels

Long service life thanks to the 10 years anti-corrosion warranty on the compressed air tank

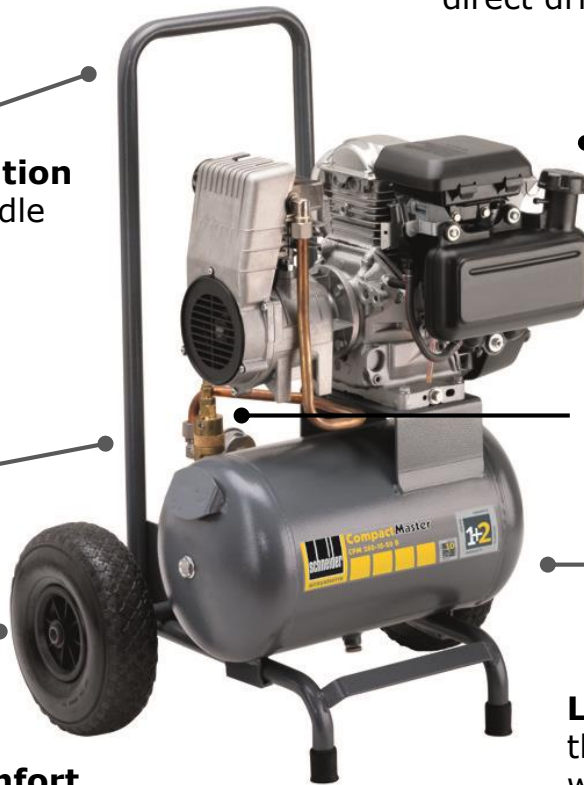

Further information

Operates fully automatically

On-off switch

Scope of delivery

Instruction manual

Warranty

12 months for industrial use
24 months for private (non-commercial) use
36 months when registered online