

CompactMaster 110-15-3 W A221000

Product specification sheet



Image: CPM 110-15-3 W

Technical Data	A221000
Air displacement	85 l/min
Max. free air delivery	49 l/min
Max. pressure	13/15 bar
Cylinder/Stage	1/1
Tank capacity	2,5 l
Voltage	230 Volt/50 Hz
Motor output	0,6 kW
Drive	1.450 min ⁻¹
Sound power level	83 dB(A)
Dimensions (WxDxH)	310 x 580 x 405mm
Weight	19,5 Kg

Product description

Fact Sheet

- Portable, one cylinder piston compressor with direct drive motor for applications up to 15 bar
- For professional users in demanding installation environments
- Excellent for construction site applications due to sturdy engineering and easy transport
- Extremely handy compressor because steel frame holds the compressed air
- Equipped with filter pressure reducer, two pressure gauges for measuring tank and outlet pressure and two brass air couplers
- Applications: staple and nail guns, rivet guns, blow out guns, air tyre inflators and cartridge guns for using grouts and adhesives

CompactMaster 110-15-3 W A221000

Product specification sheet



Excellent for construction site applications due to steel frame which protects the instruments perfectly

Very handy compressor because steel frame holds the compressed air

Two pressure gauges for measuring tank and outlet pressure


Quiet operation ensures the highest user comfort

Filter water separator guarantees **best compressed air quality**

Two quick-release couplings are provided to connect up the air supply. This couplers allow the controlled pressure and the main system pressure to release.

Stable stand and tilt resistance because of low centre of gravity and rubber feet

Long service life thanks to the ten years anti-corrosion warranty on the compressed air tank

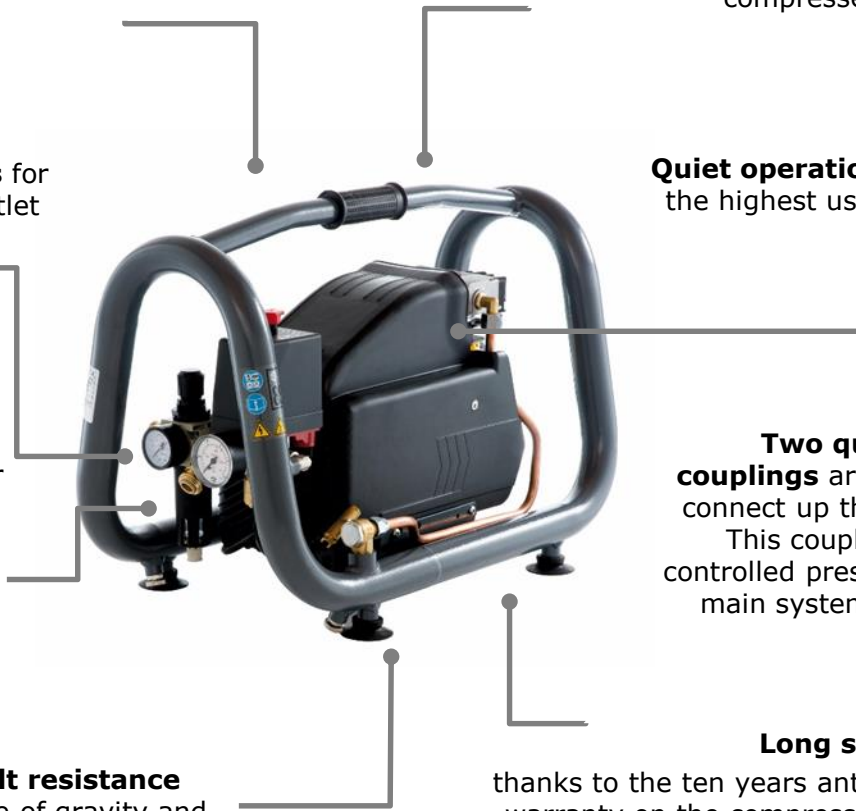

Further information

Operates fully automatically	Unloader pressure switch, motor protection and on-off switch
Scope of delivery	Instruction manual
Warranty	12 months for industrial use 24 months for private (non-commercial) use 36 months when registrated online