

UNM STS 660-10-500 XDK H813010

Product Information Sheet




Technical data	H813010
Suction capacity	660 l/min
Eff. Delivery quantity	520 l/min
Start-up- / switch-off pressure	8/10 bar
Cylinder / Stages	2/2
Tank volume	500 l
Voltage	400 Volt/50 Hz
Drive power	4.0 kW
Speed	1025 min ⁻¹
Noise	78 dB(A)
Dimensions (WxDxH)	1070 x 850 x 1945mm
Air outlet	¾"
Weight	251 kg

Product Description

- Stationary compressor
- Compressor for work up to 10 bar
- Smooth running belt driven 2-cylinder unit with 2-stage compression
- Suitable for many jobs in the professional field
- Applications:
Expansion of compressed air systems,
Increase reliability
- Highest quality of installed components
- With high performance cold dryer

UNM STS 660-10-500 XDK H813010

Product Information Sheet

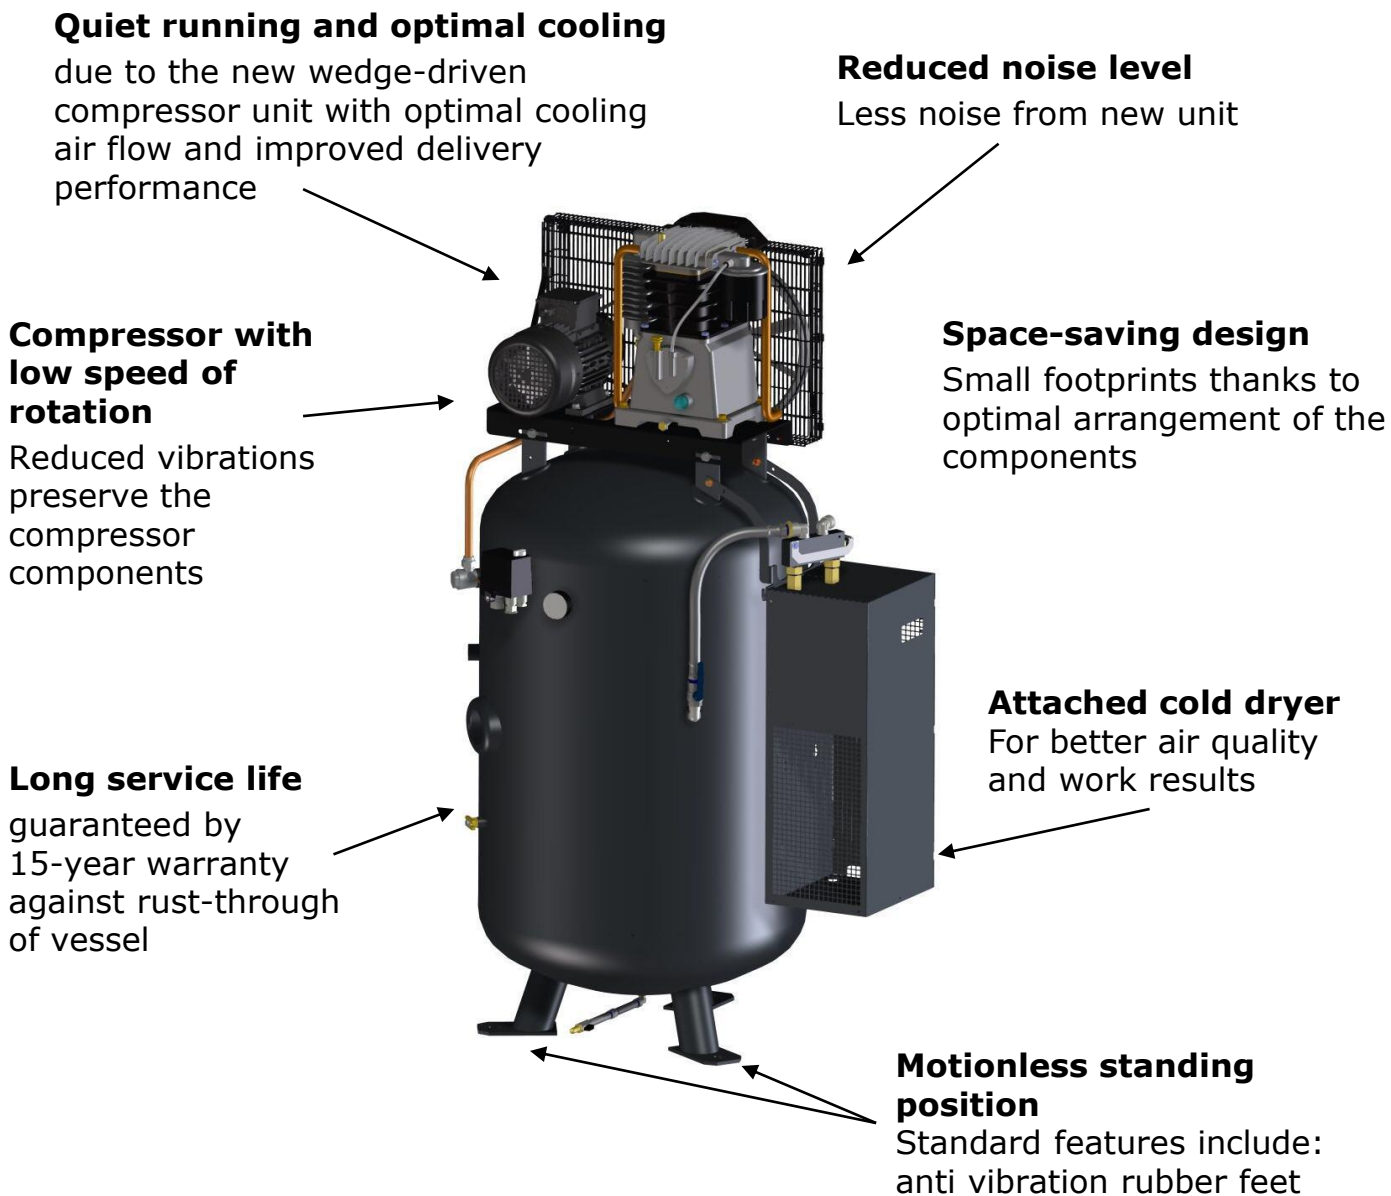

Further information

Complete equipment Pressure switch, motor protection, safety and check valve, container pressure gauge, unloaded start

Scope of delivery Instruction manual

Warranty - 12 months for professional industrial use
- 24 months for private use only