



F70G FENCE 45-315

- Powerful cordless tool to countersink 45mm (1 3/4") fence staples in pressure treated lumber
- Good balance and reduced weight
- Rubber comfort grip ensures a non-slip handling
- Belt hook
- Special nose for fence application
- Tool-free depth of drive adjustment
- Top loading magazine holds 75 staples
- Single shot actuation
- Works with Fasco fuel cells
- Powerful NiMh battery
- Lights indicate battery charge

TOOL TYPE




F70G FENCE 45-315

TOOL CHARACTERISTICS

Height	Width	Length	Weight
373 mm	108 mm	351 mm	3.740 kg
14.70 inch	4.25 inch	13.82 inch	8.24 lbs

Shot limit	1000 Shots / Hour
Speed	2-3 Shots / Second
Gas type	Liquid petroleum gas
Operating temperature	-7 / 49° C 19 / 120° F

FASTENER DATA

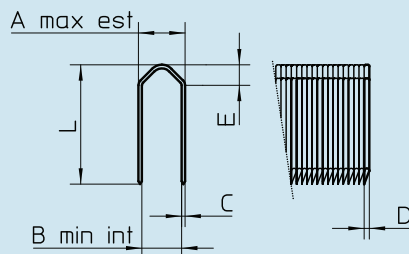

A) Outside Crown	12.80 mm	0.503"
B) Inside Crown	6.70 mm	0.264"
CxD) Wire	2.70 x 3.30 mm	0.106 x 0.130"
L) Length	25 - 45 mm	1 - 1 3/4"
Magazine Capacity	75 staples	
Staple Type	F45-315 Fence Staples	

APPLICATIONS

- livestock batten fencing including hog and cattle panels
- electrified single wire with insulator for livestock and predator control
- light mesh and light woven fencing for horticulture and nursery
- plastic mesh barriers, pet enclosures and poultry fencing
- galvanized and poly-coated vineyard trellising guide wire
- single wire including high tensile, barbed and square wire
- plastic erosion control
- snow control fencing
- coaxial and fiber optic utility wire applications

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 97.2 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 100.2 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

5.26 m/s²

ACTUATION & LOADING

Actuation System	Full Sequential Actuation
Loading	Top Loading

BATTERY

Input Charge	220-240 VAC 50 Hz
Charge Time	2 hours
Capacity	1650 MaH
Voltage	6 VDC
Shots/ Battery	max. 5200
Shots/ Fuel Cell	max. 1200

FASCO S.R.L. Italy

Via B. Buozzi 2

I - 40057 Cadriano di Granarolo (BO)

Tel. +39 051 / 60 181 | Fax +39 051 / 766 325

fasco@fasco-tools.com | www.fasco-tools.com

