

UNM STL 580-15-270 XS H825100

Product Information Sheet



Technical Data	H825100
Suction capacity	580 l/min
Eff. Delivery quantity	470 l/min
Start-up- / switch-off pressure	8/10 bar
Cylinder / Stages	2/2
Tank volume	270 l
Voltage	400 Volt/50 Hz
Drive power	4.0 kW
Speed	915 min ⁻¹
Noise	69 dB(A)
Dimensions (WxDxH)	1620 x 600 x 1315mm
Air outlet	¾"i
Weight	227 kg
Date	02.03.2011 / afal

Product Description

- Sound-insulated stationary compressor for work up to 10 bar
- Set up in sensitive areas possible because compressor is fitted with a sound absorption hood
- Smooth running belt driven 2-cylinder unit with 2-stage compression
- Standard features include: all fittings and rubber vibration elements
- Easily accessible condensate trap under the vessel

UNM STL 580-15-270 XS H825100

Product Information Sheet



Increased output and high efficiency

Due to the new wedge-driven compressor unit with optimal cooling air flow and improved delivery performance

Perfectly soundproofed

Due to sound absorption hood extremely quiet

Reduced noise level


Set up in sensitive areas possible

Low speed of rotation

Reduces vibrations, preserves components and reduces noise level

Long service life

Guaranteed by 15-year warranty against rust-through of vessel

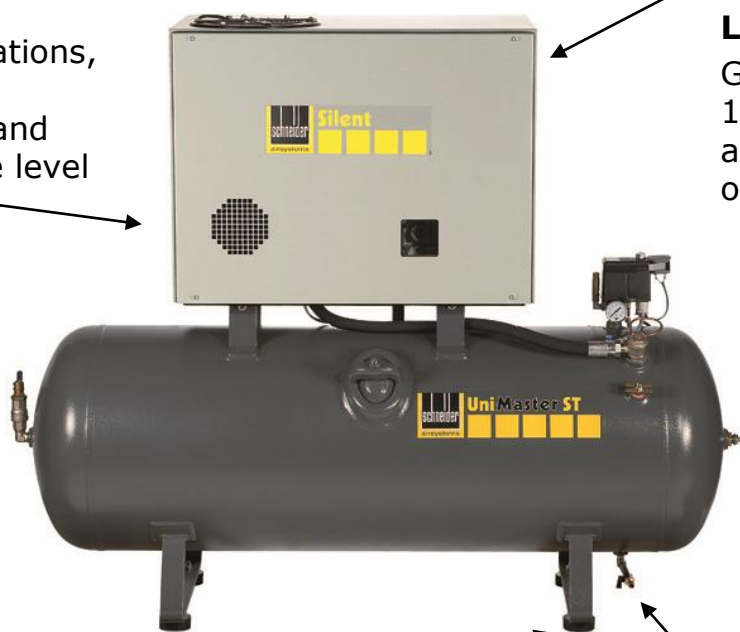

Motionless standing position

Standard features include: anti vibration rubber feet

Easily accessible condensate trap

Also simple connection of an Ecomat condensate discharger

Further information

Complete equipment

Pressure switch, motor protection, safety and check valve, container pressure gauge, unloaded start

Scope of delivery

Instruction manual

Warranty

- 12 months for professional industrial use
- 24 months for private use only