

# UNM STB 580-15-10 H824000

## Product Information Sheet



| Technical data                  | H824000               |
|---------------------------------|-----------------------|
| Suction capacity                | 580 l/min             |
| Eff. Delivery quantity          | 470 l/min             |
| Start-up- / switch-off pressure | 13/15 bar             |
| Cylinder / Stages               | 2/2                   |
| Tank volume                     | 10 l                  |
| Voltage                         | 400 Volt/50 Hz        |
| Drive power                     | 4.0 kW                |
| Speed                           | 915 min <sup>-1</sup> |
| Noise                           | 78 dB(A)              |
| Dimensions (WxDxH)              | 945 x 605 x 690mm     |
| Air outlet                      | ¾"                    |
| Weight                          | 94 kg                 |

## Product Description

- Stationary compressor
- Compressor for work up to 15 bar
- Smooth running belt driven 2-cylinder unit with 2-stage compression
- Suitable for many jobs in the professional field
- Applications:  
Expansion of compressed air systems,  
Increase reliability
- Highest quality of installed components

# UNM STB 580-15-10 H824000

## Product Information Sheet



### Quiet running and optimal cooling

due to the new wedge-driven compressor unit with optimal cooling air flow and improved delivery performance

### Reduced noise level

Less noise from new unit

### Compressor with low speed of rotation

Reduced vibrations preserve the compressor components

### Long service life


guaranteed by 15-year warranty against rust-through of vessel

### Space-saving design

Small footprints thanks to optimal arrangement of the components

### Motionless standing position

Standard features include: anti vibration rubber feet

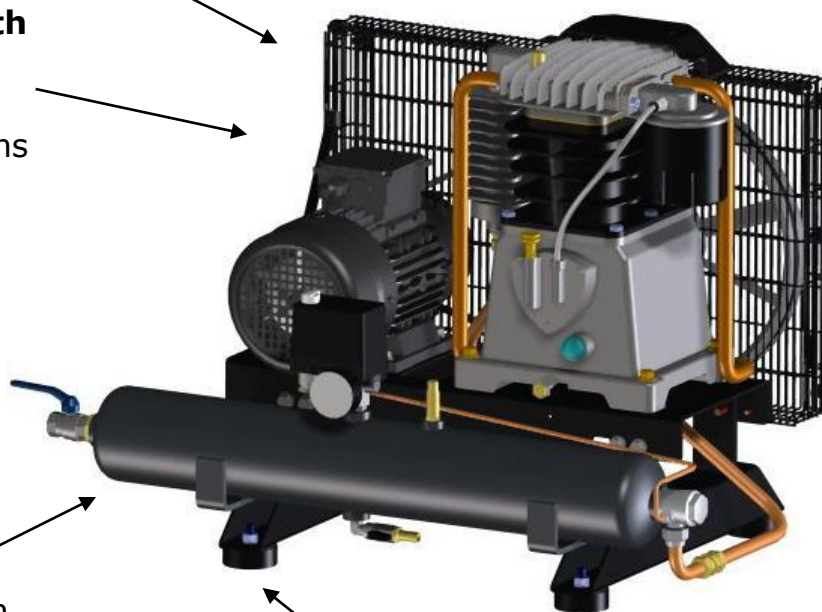

## Further information

Complete equipment

Pressure switch, motor protection, safety and check valve, container pressure gauge, unloaded start

Scope of delivery

Instruction manual

Warranty

- 12 months for professional industrial use  
- 24 months for private use only