

INNOVATION



F58AC ROOFLoc-75

- Pneumatic specialty tool that makes metal roof fastening faster than ever before
- Suitable for 0° plastic sheet Roofloc® SCRAIL® with and without leak-proof EPDM-washer
- Copyright protected design with good ergonomics and excellent tool balance
- Full sequential trigger actuation
- Easy rear loading magazine
- No mar tip and special plastic pads avoid scratches on the roof

NAIL TYPE

0° Plastic Sheet Strip RoofLoc® SCRAIL®

TOOL TYPE




F58AC ROOFLOC-75

TOOL CHARACTERISTICS

Height	Width	Length	Weight
14.76 inch	5.12 inch	16.34 inch	9.1 lbs
375 mm	130 mm	415 mm	4.13 kg

Pressure	100 - 120 psi 7 - 8 bar
Air consumption per shot	1.86 l Performances at 90 psi / 6.2 bar (0.62 MPa)

FASTENER DATA:

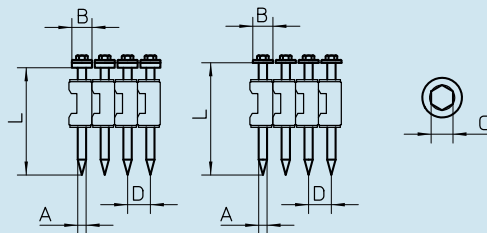

		RoofLoc® SCRAIL®
A) Wire	mm	3.8 / 4.2
	inch	0.148 - 0.165
B) Length	mm	37 - 75
	inch	1 1/2 - 3
B) Head	mm	10 (C WRENCH: 6.30)
	inch	0.400 (C WRENCH: 1/4)
Capacity		30
Fastener Type		0° Plastic Sheet Strip RoofLoc® SCRAIL®

APPLICATIONS

- for attaching metal roof to wood
- for attaching metal siding to wood
- for attaching sheet metal to steel

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 101.00 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 94.00 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

3.63 m/s²

ACTUATION & LOADING

Actuation System	Full Sequential
Loading	Rear Loading



Pretty much everything you are now using a slow screw gun and high priced screws to do, can be **SCRAIL**®ed down in the blink of an eye, with the new Star of your Tool Box - the **SCRAIL**®.

The uses of the **SCRAIL**® are only limited by your imagination.

Join **SCRAIL**® on **facebook**
www.facebook.com/scraifasteners

FASCO S.R.L. Italy

Via B. Buozzi 2
 I - 40057 Cadriano di Granarolo (BO)
 Tel. +39 051 / 60 181 | Fax +39 051 / 766 325
fasco@fasco-spa.com | www.fasco-tools.com

