

# Tyre pressure gauge

## RF 12 MG 2.5

### Product Information Sheet



Technical data	D004026
Base unit number	T460056
Pressure gauge display	0.7 – 12 bar
Maximal pressure	15 bar
Operating temperature range	-20 - + 60 °C
Hose length	2.5 m
Valve connector type	Straight plug-in valve
Dimensions (without hose) (WxDxH)	100 x 65 x 300 mm
Weight	0.8 kg
Date	23.11.2010 / afal

## Product Description

- Fact Sheet
- Particularly suitable for lorry tyres and other commercial vehicle tyres
  - With straight plug-in valve for simple use
  - With extra long hose for increased safety distance according to the BG recommendation BGI 884, point 2.2.5
  - So resistant and shock-proof that even an accidental drive over causes no damages
  - With a 3-year warranty
  - Its above-average lifetime saves costs

# Tyre pressure gauge

## RF 12 MG 2.5

### Product Information Sheet



#### Optimised readability

- Pressure gauge display 0.7- 6 bar
- Optimised and exact readability

#### Impact- and drive-over-proof pressure gauge

- The robust rubber protection makes pressure gauge absolutely shock- and impact-proof
- The high-quality technology on the inside increases the robustness of the pressure gauge in comparison to its competitors significantly

#### Extremely flexible, long hose

- 2.5 m long hose for increased safety distance according to the BG recommendation BGI 884, point 2.2.5

#### Innovative operating concept


- Easy handling
- Precise metering thanks to clearly separated buttons

#### Straight plug-in valve

- Robust straight plug-in valve for simple work

#### Calibrated

- Calibration approval (quarter and year) is shown on the pressure gauge and on the handle
- It is valid in Germany for 2 years from production date on

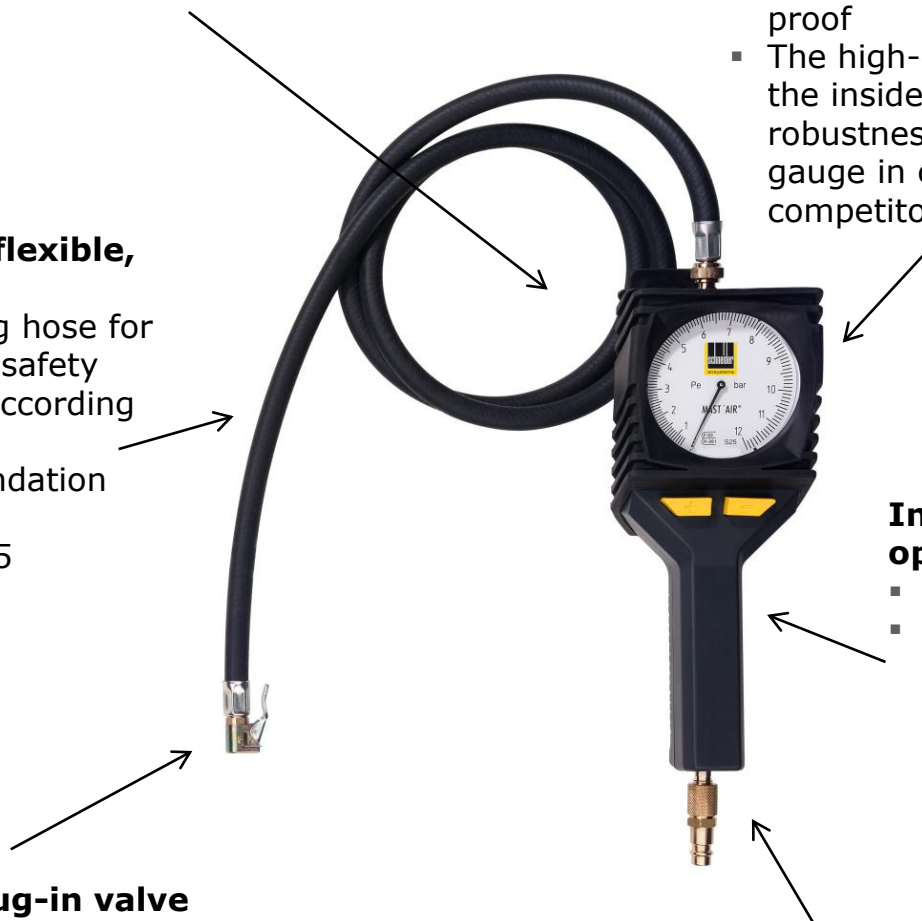

#### Further information

Scope of delivery	Instruction manual, hose, straight plug-in valve, tyre pressure gauge
Warranty	12 months for professional industrial use 24 months for private use only 36 months if registered online