

Quickly driven - LIKE A NAIL
Easily removed - LIKE A SCREW

F60 CN15W-PS90 SCR

- High power 15-degree coil nailer for nails and SCRAIL[®] up to 90mm (3 1/2")
- Compatible with wire collated as well as plastic sheet collated nails and SCRAIL[®]
- Fully pneumatic feeding and positioning system
- Switch trigger for single shot and contact actuation
- Depth control for precise countersinking
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- No-mar tip avoids marking of soft wood

NAIL TYPE

15° Wire Coil Nails, 15° CN-AG Plastic Sheet Coil Nails,
15° Wire Coil **SCRAIL**[®], 15° CN-AG Plastic Sheet Coil **SCRAIL**[®]

TOOL TYPE




F60 CN15W-PS90 SCR

TOOL CHARACTERISTICS

Height	Width	Length	Weight
387 mm	142 mm	369 mm	3.95 kg
15.24 inch	5.60 inch	14.53 inch	8.70 lbs

Pressure	5 - 8 bar 70 / 120 psi
Air consumption per shot	2.63 l 0.093 SCF Performances at 90 psi / 6.2 bar (0.62 MPa)
Lubricant	Aerospace Lubricants Tribolube 12

FASTENER DATA: NAILS

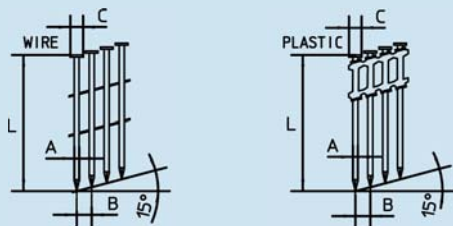

	WIRE	PLASTIC
A) Wire	2.5 - 3.8 mm 0.099 - 0.150 inch	2.5 - 3.1 mm 0.099 - 0.122 inch
Shank	Smooth Ring Screw Knurled	
B) Pitch	8.0 mm 0.315 inch	7.5 mm 0.295 inch
C) Head	5.5 - 7.1 mm 0.216 - 0.279 inch	
L) Length	45 - 90 mm 1 3/4 - 3 1/2 inch	
Magazine Capacity	200 - 300 nails	
Nail Type	15° Wire Coil Nails, 15° CN-AG Plastic Sheet Coil Nails	

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 101.3 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 91.20 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

4.5 m/s²

ACTUATION & LOADING


Actuation System*	Single Shot and Contact Actuation
Loading*	Coil

*see instruction manual

APPLICATIONS

- garden furniture
- roof joists
- rafters and joists
- decking
- siding
- trusses
- fencing
- pallets
- boxes and crates
- cable reels

SCRAIL®



	WIRE	PLASTIC
A-B) Wire	2.8 - 3.8 mm 0.113 - 0.150 inch	2.8 - 3.4 mm 0.113 - 0.134 inch
Shank	Fine Coarse Steel Thread	
C) Head	Phillips® Square Pozi (Pozidriv®) Torx®/Star Versa	
L) Length	50 - 90 mm 2 - 3 1/2 inch	
Magazine Capacity	200 - 300 SCRAIL®	
Scrail Type	15° Wire Coil SCRAIL®, 15° CN-AG Plastic Sheet Coil SCRAIL®	

SCRAIL®

The Versatile Fastener

Pretty much everything you are now using a slow screw gun and high priced screws to do, can be **SCRAIL®**ed down in the blink of an eye, with the new Star of your Tool Box - the **SCRAIL®**. The uses of the **SCRAIL®** are only limited by your imagination.

Join **SCRAIL®** on **facebook**
www.facebook.com/scraifasteners

FASCO S.R.L. Italy

Via B. Buozzi 2
I - 40057 Cadriano di Granarolo (BO)
Tel. +39 051 / 60 181 | Fax +39 051 / 766 325
fasco@fasco-tools.com | www.fasco-tools.com

FASCO®
AIR DRIVEN TOOLS

MEMBER OF THE
beck
FASTENER GROUP